

**SETUP SHEET**

Driver: **J. CLAUD**
 Date: **25/08/02**

Track:			
☐ Indoor	☒ Outdoor	☐ Carpet	☒ Sealed
☐ Tight / ☒ Open		☐ Concrete	☒ Smooth
		☒ Asphalt	☐ Rough

FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

Droop Height: **4 mm**
 Pivot Support: **2 F**

☐ In
 Toe ☒ Out **1°**

Ride Height _____

Arm Spacing

☐ FWD

☒ MDL

☐ BACK

Front Drive:

☒ Diff

☐ One-Way

☒ Standard

☐ Overdrive

☐ Underdrive

Camber ☐ - **neutre**

☐ Kickup **2°**

Caster ☒ Carrier **2°**

☒ No
 Sway Bar ☐ Yes size _____

Front Shocks

Oil: **30**

Piston: **redx** Standard / ☐ Drilled


Spring: **purple**

Limiters: ☐ Inside _____ ☐ Outside _____

of washers under steering/
 tie-rod ball studs

Spindle ball stud: _____

Bellcrank ball stud: _____

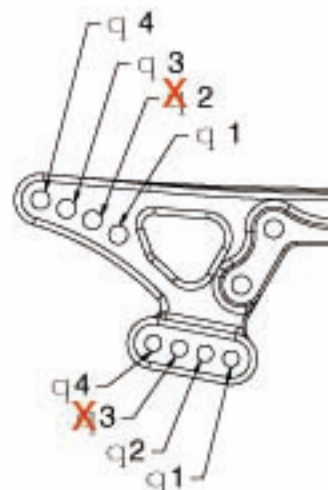

NOTES: _____

REAR SUSPENSION

Droop Height: **5 mm**
 Pivot Support: **0 R**

☒ In
 Toe ☐ Out _____

Ride Height _____

Arm Spacing

☐ FWD

☒ MDL

☐ BACK

Camber ☐ - **1°**

☒ No
 Sway Bar ☐ Yes size _____


Rear Shocks

Oil: **30**

Piston: **redx** Standard / ☐ Drilled

Spring: **silver**

Limiters: ☐ Inside _____ ☐ Outside _____

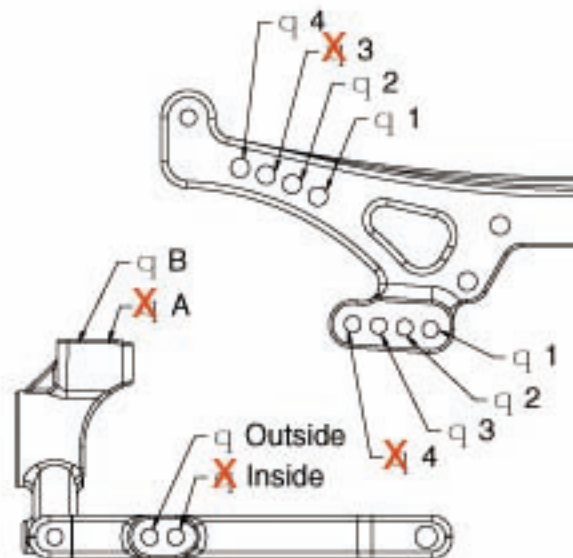

NOTES: _____

Tires:

Compound

Foam

Length

Front: **Médial Pro IAS**
 Rear: **Médial Pro IAS**

M
M

Motor: **12x1**

Pinion: **23**

Spur: **88**

Tire Diameter: _____

Body: **300 M**

Body Height: **légal**

Battery Placement: ☒ Back ☐ Forward ☐ Other: _____

Transponder Position: **derrière le servos**

Notes: _____

