

**SETUP SHEET**

Driver: February
03-04/11/2001
 Date: HPI / Orion Cup 2001

Track:
☒ Indoor
☐ Outdoor
☐ Tight / ☐ Open
☒ Carpet
☐ Concrete
☐ Asphalt
☐ Sealed
☐ Smooth
☐ Rough

FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

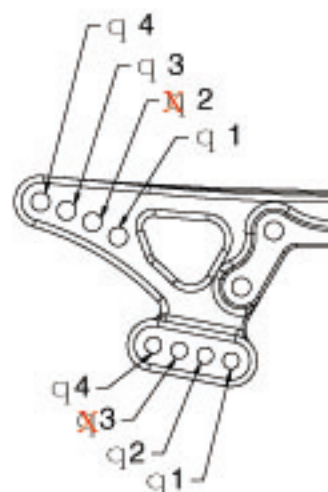
☐ In
 Toe ☒ Out léger
 Ride Height -5.5mm
 Camber ☒ - 1°
☒ Kickup 2F

Droop Height: 2Pivot Support: 2F

Arm Spacing
☒ FWD
☐ MDL
☐ BACK

Front Drive:
☒ Diff
☐ One-Way

☐ Standard
☒ Overdrive
☐ Underdrive

Caster ☐ Carrier sd

☒ No
 Sway Bar ☐ Yes size _____

of washers under steering/tie-rod ball studs

Spindle ball stud: _____

Bellcrank ball stud: _____

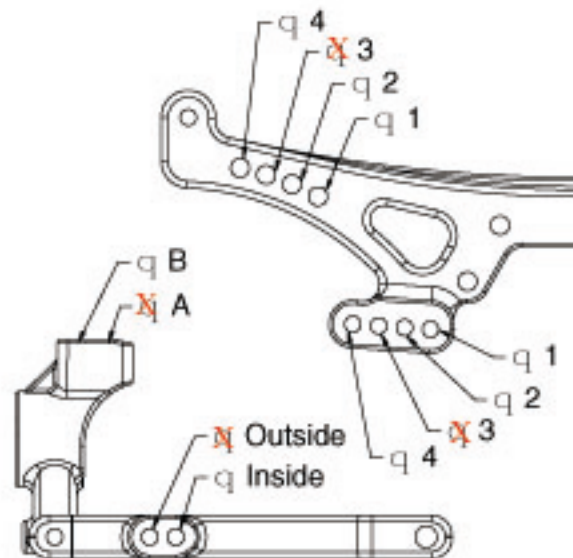
Front ShocksOil: 80Piston: 57 ☒ Standard / ☐ DrilledSpring: PurpleLimiters: ☐ Inside _____ ☐ Outside _____**NOTES:**

REAR SUSPENSION

☒ In
 Toe ☐ Out 3°
 Ride Height -5.5mm
 Camber ☒ - 1°
☒ No
 Sway Bar ☐ Yes size _____

Droop Height: 4Pivot Support: 2F

Arm Spacing
☐ FWD
☒ MDL
☐ BACK

**Rear Shocks**Oil: 80Piston: 55 ☒ Standard / ☐ DrilledSpring: BlueLimiters: ☐ Inside _____ ☐ Outside _____**NOTES:**

Tires:

Compound

Foam

Length

Front: HPI B15-40 JB Foam blue 26mmRear: HPI B15-40 JB Foam blue 26mmBattery Placement: ☐ Back ☒ Forward ☐ Other: _____Transponder Position: body's centerNotes: battery : Sanyo RC2400Motor: Team Orion 17°2Pinion: 24Spur: 88Tire Diameter: 65Body: Andy's stratus YokBody Height: legal